




CORROSION RESISTANT™ SERIES MOUNTED BEARING UNITS

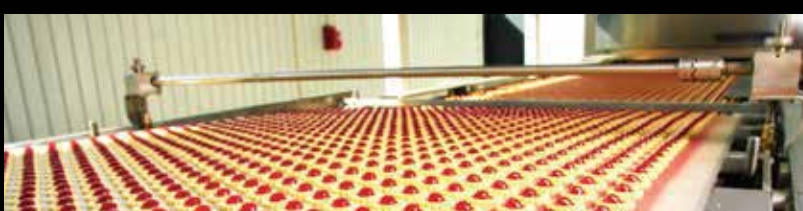

STAINLESS STEEL SERIES

- Solid base construction to withstand high temperature operations
- Full complement of housing styles provides flexibility for your application
- USDA H1 food grade grease fully compliant with FDA regulations

COMPOSITION

Housing: 304 Stainless Steel | Insert: 440C Stainless Steel | Grease Type: USDA H1 standard

NTN Number	Bore Dia.	Length	Width	Height	Bolt Hole Cntr to Cntr	Base to Shaft Cntr
Stainless Steel Series, 2-Bolt Pillow Block, Set Screw						
SUCP204	20mm	126mm	38mm	65mm	95mm	33.3mm
SUCP205	25mm	140mm	38mm	70mm	105mm	36.5mm
SUCP206	30mm	165mm	48mm	83mm	121mm	42.9mm
SUCP207	35mm	167mm	48mm	94mm	127mm	47.6mm
SUCP208	40mm	184mm	54mm	100mm	136mm	49.2mm
SUCP204-12	3/4	126mm	38mm	65mm	95mm	33.3mm
SUCP205-16	1	140mm	38mm	70mm	105mm	36.5mm
SUCP206-19	1-3/16	165mm	48mm	83mm	121mm	42.9mm
SUCP206-20	1-1/4	165mm	48mm	83mm	121mm	42.9mm
SUCP207-20	1-1/4	167mm	48mm	94mm	127mm	47.6mm
SUCP207-22	1-3/8	167mm	48mm	94mm	127mm	47.6mm
SUCP207-23	1-7/16	167mm	48mm	94mm	127mm	47.6mm
SUCP208-24	1-1/2	184mm	54mm	100mm	136mm	49.2mm
SUCP209-28	1-3/4	190mm	54mm	100mm	146mm	54mm
SUCP210-31	1-15/16	206mm	60mm	114mm	159mm	57.2mm
SUCP211-32	2	206mm	60mm	126mm	171mm	63.5mm
SUCP211-35	2-3/16	219mm	60mm	126mm	171mm	63.5mm
SUCP212-39	2-7/16	241mm	70mm	138mm	184mm	69.8mm
Stainless Steel Series, 2-Bolt Flange Unit, Set Screw						
SUCFL204	20mm	112mm	60mm	33.3mm	90mm	-
SUCFL205	25mm	125mm	68mm	35.8mm	99mm	-
SUCFL206	30mm	141mm	80mm	40.2mm	117mm	-
SUCFL207	35mm	156mm	90mm	44.4mm	130mm	-
SUCFL208	40mm	172mm	100mm	51.2mm	144mm	-
SUCFL204-12	3/4	112mm	60mm	33.3mm	90mm	-
SUCFL205-16	1	125mm	68mm	35.8mm	99mm	-
SUCFL206-19	1-3/16	141mm	80mm	40.2mm	117mm	-
SUCFL206-20	1-1/4	141mm	80mm	40.2mm	117mm	-
SUCFL207-20	1-1/4	156mm	90mm	44.4mm	130mm	-
SUCFL207-22	1-3/8	156mm	90mm	44.4mm	130mm	-
SUCFL207-23	1-7/16	156mm	90mm	44.4mm	130mm	-
SUCFL208-24	1-1/2	172mm	100mm	51.2mm	144mm	-
SUCFL209-28	1-3/4	180mm	108mm	52.2mm	148mm	-
SUCFL210-31	1-15/16	190mm	115mm	54.6mm	157mm	-
Stainless Steel Series, 4-Bolt Flange Unit, Set Screw						
SUCF204	20mm	86mm	86mm	33.3mm	64mm	-
SUCF205	25mm	95mm	95mm	35.8mm	70mm	-
SUCF206	30mm	108mm	108mm	40.2mm	83mm	-
SUCF207	35mm	116mm	116mm	44.4mm	92mm	-
SUCF208	40mm	130mm	130mm	51.2mm	102mm	-
SUCF204-12	3/4	86mm	86mm	33.3mm	64mm	-
SUCF205-16	1	95mm	95mm	35.8mm	70mm	-
SUCF206-19	1-3/16	108mm	108mm	40.2mm	83mm	-
SUCF206-20	1-1/4	108mm	108mm	40.2mm	83mm	-
SUCF207-22	1-3/8	116mm	116mm	44.4mm	92mm	-
SUCF207-23	1-7/16	116mm	116mm	44.4mm	92mm	-
SUCF208-24	1-1/2	130mm	130mm	51.2mm	102mm	-
SUCF209-28	1-3/4	137mm	137mm	52.2mm	105mm	-
SUCF210-31	1-15/16	143mm	143mm	54.6mm	111mm	-
SUCF211-32	2	162mm	162mm	58.4mm	130mm	-
SUCF211-35	2-3/16	162mm	162mm	58.4mm	130mm	-
SUCF212-39	2-7/16	175mm	175mm	68.7mm	143mm	-
Stainless Steel Series, 2-Bolt Tapped Base, Set Screw						
SUCPA204	20mm	73mm	38mm	65mm	50.8mm	33.3mm
SUCPA205	25mm	76mm	38mm	71mm	50.8mm	36.5mm
SUCPA206	30mm	102mm	38mm	86mm	76.2mm	42.9mm
SUCPA207	35mm	108mm	48mm	95mm	82.6mm	47.6mm
SUCPA208	40mm	117mm	48mm	100mm	89mm	49.2mm
Stainless Steel Series, Take-Up Unit, Set Screw						
SUCT204	20mm	94mm	76mm	32mm	-	-
SUCT205	25mm	97mm	76mm	32mm	-	-
SUCT206	30mm	113mm	89mm	37mm	-	-
SUCT207	35mm	129mm	89mm	37mm	-	-
SUCT208	40mm	144mm	102mm	49mm	-	-

NTN Number	Bore Dia.	Length	Width	Height	Bolt Hole Cntr to Cntr	Base to Shaft Cntr
Stainless Steel Series, 2-Bolt Pillow Block, Eccentric Lock						
SESP204	20mm	126mm	38mm	65mm	95mm	33.3mm
SESP205	25mm	140mm	38mm	70mm	105mm	36.5mm
SESP206	30mm	165mm	48mm	83mm	121mm	42.9mm
SESP207	35mm	167mm	48mm	94mm	127mm	47.6mm
SESP208	40mm	184mm	54mm	100mm	136mm	49.2mm
SESP204-12	3/4	126mm	38mm	65mm	95mm	33.3mm
SESP205-16	1	140mm	38mm	70mm	105mm	36.5mm
SESP206-19	1-3/16	165mm	48mm	83mm	121mm	42.9mm
SESP206-20	1-1/4	165mm	48mm	83mm	121mm	42.9mm
SESP207-20	1-1/4	167mm	48mm	94mm	127mm	47.6mm
SESP207-22	1-3/8	167mm	48mm	94mm	127mm	47.6mm
SESP207-23	1-7/16	167mm	48mm	94mm	127mm	47.6mm
SESP208-24	1-1/2	184mm	54mm	100mm	136mm	49.2mm
SESP209-28	1-3/4	190mm	54mm	109mm	146mm	54mm
SESP210-31	1-15/16	206mm	60mm	114mm	159mm	57.2mm
SESP211-32	2-3/16	219mm	60mm	126mm	171mm	63.5mm
Stainless Steel Series, 2-Bolt Flange Unit, Eccentric Lock						
SESFL204	20mm	112mm	60mm	39mm	90mm	-
SESFL205	25mm	125mm	68mm	39.5mm	99mm	-
SESFL206	30mm	141mm	80mm	45.7mm	117mm	-
SESFL207	35mm	156mm	90mm	49.4mm	130mm	-
SESFL208	40mm	172mm	100mm	55.7mm	144mm	-
SESFL204-12	3/4	112mm	60mm	39mm	90mm	-
SESFL205-16	1	125mm	68mm	39.5mm	99mm	-
SESFL206-19	1-3/16	141mm	80mm	45.7mm	117mm	-
SESFL206-20	1-1/4	141mm	80mm	45.7mm	117mm	-
SESFL207-22	1-3/8	156mm	90mm	49.4mm	130mm	-
SESFL207-23	1-7/16	156mm	90mm	49.4mm	130mm	-
SESFL208-24	1-1/2	172mm	100mm	55.7mm	144mm	-
SESFL209-28	1-3/4	180mm	108mm	56.2mm	148mm	-
SESFL210-31	1-15/16	190mm	115mm	55.7mm	157mm	-
Stainless Steel Series, 4-Bolt Flange Unit, Eccentric Lock						
SESF204	20mm	86mm	86mm	33.3mm	64mm	-
SESF205	25mm	95mm	95mm	35.8mm	70mm	-
SESF206	30mm	108mm	108mm	40.2mm	83mm	-
SESF207	35mm	116mm	116mm	44.4mm	92mm	-
SESF208	40mm	130mm	130mm	51.2mm	102mm	-
SESF204-12	3/4	86mm	86mm	33.3mm	64mm	-
SESF205-16	1	95mm	95mm	35.8mm	70mm	-
SESF206-19	1-3/16	108mm	108mm	40.2mm	83mm	-
SESF206-20	1-1/4	108mm	108mm	40.2mm	83mm	-
SESF207-22	1-3/8	116mm	116mm	44.4mm	92mm	-
SESF207-23	1-7/16	116mm	116mm	44.4mm	92mm	-
SESF208-24	1-1/2	130mm	130mm	51.2mm	102mm	-
SESF209-28	1-3/4	137mm	137mm	52.2mm	105mm	-
SESF210-31	1-15/16	143mm	143mm	54.6mm	111mm	-
SESF211-32	2	162mm	162mm	58.4mm	130mm	-

§ Additional size, mount and lubrication configurations available.



THERMOPLASTIC SERIES

- Designed for optimal protection from mold, bacteria and chemical cleaning agents
- Snap fit end caps provide additional protection during high pressure washdown
- Custom lubrication options include food grade solid lube grease

COMPOSITION

Housing: White PBT | Insert: 440C Stainless Steel or Zinc Chromate Plated Bearing Steel
Grease Type: USDA H1 standard

NTN Number	Bore Dia.	Length	Width	Height	Bolt Hole Cntr to Cntr	Base to Shaft Cntr
Thermoplastic Series, 2-Bolt Pillow Block, Set Screw, Stainless Steel Insert						
MUCPPL204*	20mm	127mm	38mm	65mm	95mm	33.3mm
MUCPPL205*	25mm	140mm	38mm	71mm	105mm	36.5mm
MUCPPL206*	30mm	162mm	38mm	71mm	119mm	42.9mm
MUCPPL207*	35mm	167mm	48mm	94mm	127mm	47.6mm
MUCPPL208*	40mm	184mm	54mm	98mm	137mm	49.2mm
MUCPPL204-12*	3/4	127mm	38mm	65mm	95mm	33.3mm
MUCPPL205-16*	1	140mm	38mm	71mm	105mm	36.5mm
MUCPPL206-19*	1-3/16	162mm	38mm	71mm	119mm	42.9mm
MUCPPL206-20*	1-1/4	162mm	38mm	71mm	119mm	42.9mm
MUCPPL207-20*	1-1/4	167mm	48mm	94mm	127mm	47.6mm
MUCPPL207-23*	1-7/16	167mm	48mm	94mm	127mm	47.6mm
MUCPPL208-24*	1-1/2	184mm	54mm	98mm	137mm	49.2mm
Thermoplastic Series, 2-Bolt Flange Unit, Set Screw, Stainless Steel Insert						
MUCNFL204†	20mm	130mm	65mm	33.7mm	90mm	-
MUCNFL205†	25mm	130mm	70mm	36.7mm	99mm	-
MUCNFL206†	30mm	148mm	80mm	41.2mm	117mm	-
MUCNFL207†	35mm	163mm	90mm	43.4mm	130mm	-
MUCNFL208†	40mm	175mm	100mm	51.7mm	144mm	-
MUCNFL204-12†	3/4	130mm	65mm	33.7mm	90mm	-
MUCNFL205-16†	1	130mm	70mm	36.7mm	99mm	-
MUCNFL206-19†	1-3/16	148mm	80mm	41.2mm	117mm	-
MUCNFL206-20†	1-1/4	148mm	80mm	41.2mm	117mm	-
MUCNFL207-20†	1-1/4	163mm	90mm	43.4mm	130mm	-
MUCNFL207-23†	1-7/16	163mm	90mm	43.4mm	130mm	-
MUCNFL208-24†	1-1/2	175mm	100mm	51.7mm	144mm	-
Thermoplastic Series, 4-Bolt Flange Unit, Set Screw, Stainless Steel Insert						
MUCFPL204‡	20mm	86mm	86mm	36.3mm	63.5mm	-
MUCFPL205‡	25mm	95mm	95mm	36.7mm	70mm	-
MUCFPL206‡	30mm	107mm	107mm	41.4mm	83mm	-
MUCFPL207‡	35mm	118mm	118mm	46.9mm	92mm	-
MUCFPL208‡	40mm	130mm	130mm	53.2mm	102mm	-
MUCFPL204-12‡	3/4	86mm	86mm	36.3mm	63.5mm	-
MUCFPL205-16‡	1	95mm	95mm	36.7mm	70mm	-
MUCFPL206-19‡	1-3/16	107mm	107mm	41.4mm	83mm	-
MUCFPL206-20‡	1-1/4	107mm	107mm	41.4mm	83mm	-
MUCFPL207-20‡	1-1/4	118mm	118mm	46.9mm	92mm	-
MUCFPL207-23‡	1-7/16	118mm	118mm	46.9mm	92mm	-
MUCFPL208-24‡	1-1/2	130mm	130mm	53.2mm	102mm	-
Thermoplastic Series, 3-Bolt Flange Unit, Set Screw, Stainless Steel Insert						
MUCFBL204	20mm	108mm	63.5mm	33.7mm	38.1mm	-
MUCFBL205	25mm	120.6mm	70mm	41.2mm	41.3mm	-
MUCFBL206	30mm	138.5mm	83mm	41.5mm	47.6mm	-
MUCFBL207	35mm	157mm	95mm	47.1mm	50.8mm	-
MUCFBL204-12	3/4	108mm	63.5mm	33.7mm	38.1mm	-
MUCFBL205-16	1	120.6mm	70mm	41.2mm	41.3mm	-
MUCFBL206-19	1-3/16	138.5mm	83mm	41.5mm	47.6mm	-
MUCFBL206-20	1-1/4	138.5mm	83mm	41.5mm	47.6mm	-
MUCFBL207-20	1-1/4	157mm	95mm	47.1mm	50.8mm	-
MUCFBL207-23	1-7/16	157mm	95mm	47.1mm	50.8mm	-

NTN Number	Bore Dia.	Length	Width	Height	Bolt Hole Cntr to Cntr	Base to Shaft Cntr
Thermoplastic Series, 2-Bolt Pillow Block, Set Screw, Zinc Chromate Insert						
ZUCPPL204	20mm	127mm	38mm	65mm	95mm	33.3mm
ZUCPPL205	25mm	140mm	38mm	71mm	105mm	36.5mm
ZUCPPL206	30mm	162mm	38mm	71mm	119mm	42.9mm
ZUCPPL207	35mm	167mm	48mm	94mm	127mm	47.6mm
ZUCPPL208	40mm	184mm	54mm	98mm	137mm	49.2mm
ZUCPPL204-12	3/4	127mm	38mm	65mm	95mm	33.3mm
ZUCPPL205-16	1	140mm	38mm	71mm	105mm	36.5mm
ZUCPPL206-19	1-3/16	162mm	38mm	71mm	119mm	42.9mm
ZUCPPL206-20	1-1/4	162mm	38mm	71mm	119mm	42.9mm
ZUCPPL207-20	1-1/4	167mm	48mm	94mm	127mm	47.6mm
ZUCPPL207-23	1-7/16	167mm	48mm	94mm	127mm	47.6mm
ZUCPPL208-24	1-1/2	184mm	54mm	98mm	137mm	49.2mm
Thermoplastic Series, 2-Bolt Flange Unit, Set Screw, Zinc Chromate Insert						
ZUCNFL204	20mm	130mm	65mm	33.7mm	90mm	-
ZUCNFL205	25mm	130mm	70mm	36.7mm	99mm	-
ZUCNFL206	30mm	148mm	80mm	41.2mm	117mm	-
ZUCNFL207	35mm	163mm	90mm	43.4mm	130mm	-
ZUCNFL208	40mm	175mm	100mm	51.7mm	144mm	-
ZUCNFL204-12	3/4	130mm	65mm	33.7mm	90mm	-
ZUCNFL205-16	1	130mm	70mm	36.7mm	99mm	-
ZUCNFL206-19	1-3/16	148mm	80mm	41.2mm	117mm	-
ZUCNFL206-20	1-1/4	148mm	80mm	41.2mm	117mm	-
ZUCNFL207-20	1-1/4	163mm	90mm	43.4mm	130mm	-
ZUCNFL207-23	1-7/16	163mm	90mm	43.4mm	130mm	-
ZUCNFL208-24	1-1/2	175mm	100mm	51.7mm	144mm	-
Thermoplastic Series, 4-Bolt Flange Unit, Set Screw, Zinc Chromate Insert						
ZUCFPL204	20mm	86mm	86mm	36.3mm	63.5mm	-
ZUCFPL205	25mm	95mm	95mm	36.7mm	70mm	-
ZUCFPL206	30mm	107mm	107mm	41.4mm	83mm	-
ZUCFPL207	35mm	118mm	118mm	46.9mm	92mm	-
ZUCFPL208	40mm	130mm	130mm	53.2mm	102mm	-
ZUCFPL204-12	3/4	86mm	86mm	36.3mm	63.5mm	-
ZUCFPL205-16	1	95mm	95mm	36.7mm	70mm	-
ZUCFPL206-19	1-3/16	107mm	107mm	41.4mm	83mm	-
ZUCFPL206-20	1-1/4	107mm	107mm	41.4mm	83mm	-
ZUCFPL207-20	1-1/4	118mm	118mm	46.9mm	92mm	-
ZUCFPL207-23	1-7/16	118mm	118mm	46.9mm	92mm	-
ZUCFPL208-24	1-1/2	130mm	130mm	53.2mm	102mm	-
Thermoplastic Series, 3-Bolt Flange Unit, Set Screw, Zinc Chromate Insert						
ZUCFBL204	20mm	108mm	63.5mm	33.7mm	38.1mm	-
ZUCFBL205	25mm	120.6mm	70mm	41.2mm	41.3mm	-
ZUCFBL206	30mm	138.5mm	83mm	41.5mm	47.6mm	-
ZUCFBL207	35mm	157mm	95mm	47.1mm	50.8mm	-
ZUCFBL204-12	3/4	108mm	63.5mm	33.7mm	38.1mm	-
ZUCFBL205-16	1	120.6mm	70mm	41.2mm	41.3mm	-
ZUCFBL206-19	1-3/16	138.5mm	83mm	41.5mm	47.6mm	-
ZUCFBL206-20	1-1/4	138.5mm	83mm	41.5mm	47.6mm	-
ZUCFBL207-20	1-1/4	157mm	95mm	47.1mm	50.8mm	-
ZUCFBL207-23	1-7/16	157mm	95mm	47.1mm	50.8mm	-

Additional size, mount and lubrication configurations available.

* Formerly GNP series

† Formerly GSFT series

‡ Formerly GSF series



BEARING ACCESSORIES

- Stainless steel and thermoplastic end caps provide additional protection to bearing inserts during washdown cycles
- Stainless steel end caps are designed for use with machine-faced stainless steel housing styles (use N suffix when ordering)

NTN Number	Supports	Outer Diameter	Cap Height
Thermoplastic Series, Open End Cap			
CV20	MUC/ZUC 204 Series	50.1mm	23mm
CV25	MUC/ZUC 205 Series	55mm	25mm
CV30	MUC/ZUC 206 Series	64mm	30mm
CV35	MUC/ZUC 207 Series	74.5mm	32mm
CV40	MUC/ZUC 208 Series	84mm	37mm
Thermoplastic Series, Closed End Cap			
CF20	MUC/ZUC 204 Series	50.1mm	23mm
CF25	MUC/ZUC 205 Series	55mm	25mm
CF30	MUC/ZUC 206 Series	64mm	30mm
CF35	MUC/ZUC 207 Series	74.5mm	32mm
CF40	MUC/ZUC 208 Series	84mm	37mm

NTN Number	Supports	Outer Diameter	Cap Height
Stainless Steel Series, Open End Cap			
SCC204	SUC 204 Series	54mm	13mm
SCC205	SUC 205 Series	60mm	13mm
SCC206	SUC 206 Series	70mm	13mm
SCC207	SUC 207 Series	80mm	15.9mm
SCC208	SUC 208 Series	88mm	19mm
Stainless Steel Series, Closed End Cap			
SCOU204-12	SUC204-12 Types	54mm	13mm
SCOU205-16	SUC205-16 Types	60mm	13mm
SCOU206-19	SUC206-19 Types	70mm	13mm
SCOU206-20	SUC206-20 Types	70mm	13mm
SCOU207-20	SUC207-20 Types	80mm	15.9mm
SCOU207-22	SUC207-22 Types	80mm	15.9mm
SCOU207-23	SUC207-23 Types	80mm	15.9mm
SCOU208-24	SUC208-24 Types	88mm	19mm

Additional size, mount and lubrication configurations available.

TOPLINE™ RADIAL SERIES



The criteria considered for selecting the appropriate series are temperature, speed and safety requirements.

- TOPLINE ball bearings are rated for extremely low (as low as -75°F) and high (over 400°F) temperatures.
- Sealed or shielded configurations provide additional protection from liquid contamination.

PRODUCT LINE VERSATILITY



NTN offers a diverse array of bearing solutions that go beyond mounted unit design.

Contact your NTN representative today to see how we can help address your processing needs.

For more information contact your NTN Sales Representative.

For technical questions email eng@ntnamerica.com

PART NOMENCLATURE

ZUC		NFL	205	—	16	CC
Bearing Insert		Housing	Insert Size		Bore Diameter	Suffix
Bearing Insert		Housing			Suffix	
Stainless Steel Series		Stainless Steel Series			General	
SES	Stainless steel insert, eccentric lock	F	Four-Bolt flange		FG1	Food grade solid lube grease
SUC	Stainless steel insert, set screw	FL	Two-bolt flange			
		P	Two -Bolt pillow block			
Thermoplastic Series		Thermoplastic Series			Stainless Steel Series	
MUC	Stainless steel insert, set screw	NFL	Two-bolt flange		N	Machined face for end cap support
ZUC	Zinc chromate insert, set screw	FPL	Four-bolt flange		CC	Closed cap configuration
		PPL	Two-bolt pillow block		CO	Open cap configuration
		FBL	Three-bolt flange			

PRODUCT INTERCHANGE MATRIX - THERMOPLASTIC SERIES

Mounting Type	NTN-SNR	MRC	AMI	Browning	Peer
Pillow Block*	MUCPPL	CPB100-SS	MUCPPL	CPS-S200	SUCP200-PBT
Two-Bolt Flange*	MUCNFL	C2F100-SS	MUCNFL	CF2S-S200	SUCFL200-PBT
Four-Bolt Flange*	MUCFPL	C4F100-SS	MUCFPL	CF4S-S200	SUCF200-PBT
Three-Bolt Flange*	MUCFBL	CBF100-SS	MUCFBL	-	SUCFB200-PBT
Pillow Block**	ZUCPPL	CPB100-ZM	UCPPL	CPS-Z200	ZUCP200-PBT
Two-Bolt Flange**	ZUCNFL	C2F100-ZM	UCNFL	CF2S-Z200	ZUCFL200-PBT
Four-Bolt Flange**	ZUCFPL	C4F100-ZM	UCFPL	CF4S-S200	ZUCF200-PBT
Three-Bolt Flange**	ZUCFBL	CBF100-ZM	UCFBL	-	ZUCFB200-PBT

*Stainless steel insert series

**Zinc chromate insert series

PRODUCT INTERCHANGE MATRIX- STAINLESS STEEL SERIES

Mounting Type	NTN-SNR	MRC	AMI	Browning	Peer
Pillow Block	SUCP	SPBSS	MUCP	SPS-S200	SSUCP200
Two-Bolt Flange	SUCFL	S2FSS	MUCFL	SF2S-S200	SSUCFT200
Four-Bolt Flange	SUCF	S4FSS	MUCF	SF4S-S200	SSUCF200
Tapped Base	SUCPA	STBSS	MUCTB	STBS-S200	SSUCPA
Take-Up Unit	SUCT	-	MUCT	-	SSUCT200



REVOLUTION IN MOTION®

GLOBAL PRESENCE

EXPANSIVE PRODUCT LINE

SUPPORT FOR
WIDE RANGE OF INDUSTRIES

COMMITMENT TO INNOVATION



NTN is one of the world's largest bearing producers. With manufacturing plants throughout the world, NTN is a leading bearing supplier to both the industrial and automotive markets. Founded in 1918, NTN has long been recognized for the most stringent quality standards and counts some of the most recognized industrial brand names as its customers.

NTN®

www.ntnamerica.com



NTN HEADQUARTERS 1600 E. Bishop Ct., Mt. Prospect, IL 60056-7604
847.298.7500 | 800.323.2358